

Features

- Internally frequency compensated for unity gain
- Large DC voltage gain: 100dB
- Wide power supply range: 3V ~ 32V (or 1.5V ~ 16V)
- Input common-mode voltage range includes ground
- Large output voltage swing: 0V DC to VCC-1.5V DC
- Power drain suitable for battery operation
- Low input offset voltage and offset current
- Differential input voltage range equal to the power supply voltage

Application

- Motor Control
- Portable Audio Device
- Power Supply and Mobile Charger
- Personal Health Monitoring Device
- Commercial Network and Server Power Supply Unit
- Motor Control

Description

The CBM contains two independent high gain operational amplifiers with internal frequency compensation. The two op-amps operate over a wide voltage range from a single power supply. Also use a split power supply. The device has low power supply current drain, regardless of the power supply voltage. The low power drain also makes the CBM a good choice for battery operation.

When your project calls for a traditional op-amp function, now you can streamline your design with a simple single power supply. Use ordinary +5VDC common to practically any digital system or personal computer application, without requiring an extra 15V power supply just to have the interface electronics you need.

The CBM is a versatile, rugged workhorse with a thousand-and-one uses, from amplifying signals from a variety of transducers to dc gain blocks, or any op-amp function. The attached pages offer some recipes that will have your project cooking in no time.

CATALOG

Features.....	1
Application.....	1
Description.....	1
Catalog.....	2
Revision log.....	3
Pin Configurations.....	3
Pin Description.....	3
Absolute Maximum Ratings ⁽¹⁾	4
Recommended Operating Conditions.....	5
Electrical Characteristics.....	5
Typical Characteristics.....	6
Typical Application Circuits.....	11
Package/Ordering Information.....	8
SOP-8.....	8
TSSOP-8.....	9
Package/Ordering Information.....	10

Revision Log

Version	Revision date	Change content	Reason for Change	Modified by	Reviewed By	Note
V1.0	2025.10.29	Update the issue of inconsistent IB parameters	Error Update	WW	LYL	
V1.1	2026.1.28	Add test conditions for AOL, CMRR and PSRR; add TSSOP8 POD	Regular Update	WW	LYL	

Pin Configurations

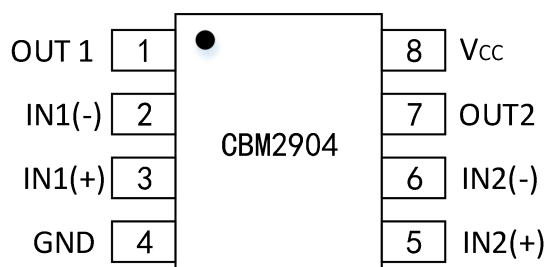


Figure 1. SOP-8 Pin Definition

Pin Description

PIN_N	SYMBOL	I/O	NAME AND FUNCTION
1	OUT1	O	Output A
2	IN1(-)	I	inverting input A
3	IN1(+)	I	None inverting input A
4	GND	--	Negative power supply
5	IN2(+)	I	None inverting input B
6	IN2(-)	I	inverting input B
7	OUT2	O	Output B
8	V _{CC}	--	Positive power supply

Absolute Maximum Ratings ⁽¹⁾

Symbol	Min	Max
V_{CC}	Power Supply Voltages Single Supply	32V
	Split Supplies	$\pm 16V$
V_{IDR}	Input Differential Voltage Range (1)	$\pm 32V$
V_{ICR}	Input Common Mode Voltage Range	-0.3~32V
I_{SC}	Output Short Circuit Duration	Continuous
T_J	Junction Temperature	150°C
	Plastic Packages	
T_{STG}	Storage Temperature	-55~125°C
	Plastic Packages	
I_{IN}	Input Current, per pin (2)	50mA
T_L	Lead Temperature, 1mm from Case for 10 Seconds	260°C

ERecommended Operating Conditions

Symbol	Parameter	Min	Max	Unit
V_{CC}	DC Supply Voltage	± 2.5 or 5.0	± 15 or 30	V
T_A	Operating Temperature, All Package Types	-40	+105	$^{\circ}\text{C}$

Electrical Characteristics

Symbol	Parameter	Min	Typ	Unit
Input Offset Voltage	$V_O=1.4\text{V}, V_{CC}=5.0\text{--}30\text{V};$ $R_S=0\Omega, V_{ICM}=0\text{V to } V_{CC}-1.7\text{V}$	--	--	mV
Input Offset Voltage Drift	$R_S=0\Omega, V_{CC}=30\text{V}$	--	7.0	$\mu\text{V}/^{\circ}\text{C}$
Input Bias Current	$V_{CC}=5.0\text{V}$	--	--	nA
Input Offset Current	$V_{CC}=5.0\text{V}$	--	--	nA
Input Offset Current Drift	$R_S=0\Omega, V_{CC}=30\text{V}$	--	10	$\text{pA}/^{\circ}\text{C}$
Input Common Mode Voltage Range	$V_{CC}=30\text{V}$	0	--	V
Power Supply Current	$R_L=\infty, V_{CC}=30\text{V}, V_O=0\text{V}$ $R_L=\infty, V_{CC}=5\text{V}, V_O=0\text{V}$	0.3 0.3	--	mA
Common Mode Rejection	$V_{CC}=30\text{V}, R_S=10\text{K}\Omega, 0\text{V} \leq V_{CM} \leq V_{CC}-1.5\text{V}$	65*	--	dB
Power Supply Rejection	$V_{CC}=5\text{V to } 30\text{V}, V_{CM}=0\text{V}$	65*	--	dB
Channel Separation	$f=1\text{KHz to } 20\text{KHz}, V_{CC}=30\text{V}$	-120	--	dB
Minimum Large Signal Open-Loop Voltage Gain	$V_{CC}=15\text{V}, R_L \geq 2\text{K}\Omega, V_{CM}=V_{CC}/2,$ $V_O=1.4 \sim 11.4\text{V}$	15 25*	--	V/mV
Output High-Level Voltage Swing	$V_{CC}=30\text{V}, R_L=2\text{K}\Omega$	26	--	V
	$V_{CC}=30\text{V}, R_L=10\text{K}\Omega$	27	--	V
Output Low-Level Voltage Swing	$V_{CC}=5\text{V}, R_L=10\text{K}\Omega$	--	--	mV
Power Supply Rejection	$V_{CM} = 2.7\text{V} \text{ 至 } 5.5\text{V}$	75	89	dB

Output Short Circuit to GND	$V_{CC}=5.0V, V_O=0V$	--	--	mA
Source Output Current	$V_{IN+}=1V, V_{IN-}=0V,$ $V_{CC}=15V, V_O=2V$	10	--	mA
Output Sink Current	$V_{IN+}=0V, V_{IN-}=1V, V_{CC}=15V, V_O=15V$	5	--	mA
	$V_{IN+}=0V, V_{IN-}=1V, V_{CC}=15V, V_O=0.2V$	10* 12*		μA
Differential Input Voltage Range	All V_{IN} GND or V-Supply (if used)	--	0.01	V

*=@25°C

Typical Characteristics

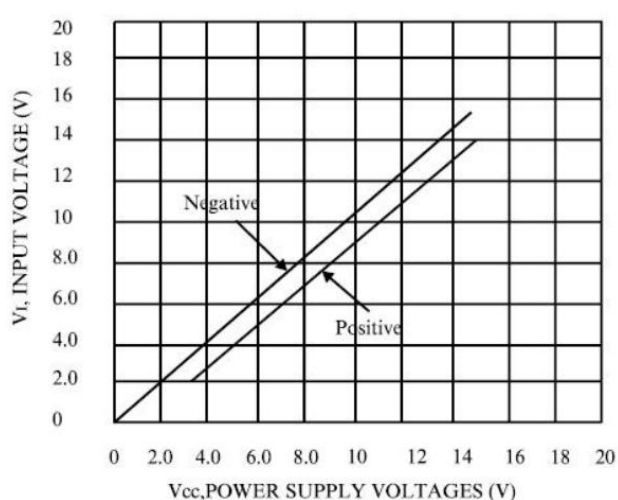


Figure 2. Input Voltage Range

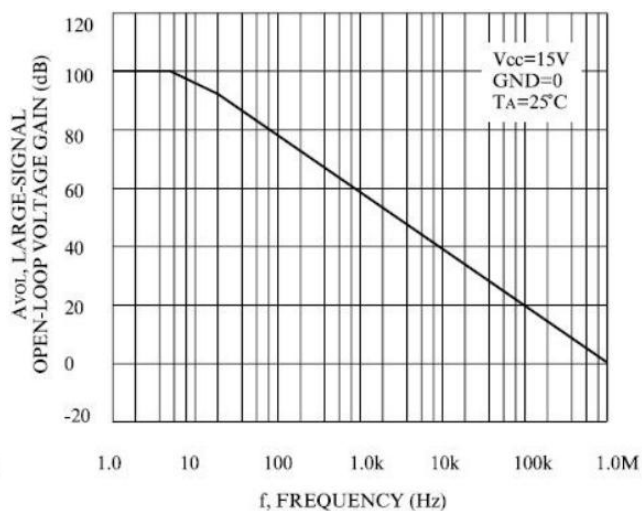


Figure 3. Open-Loop Frequency

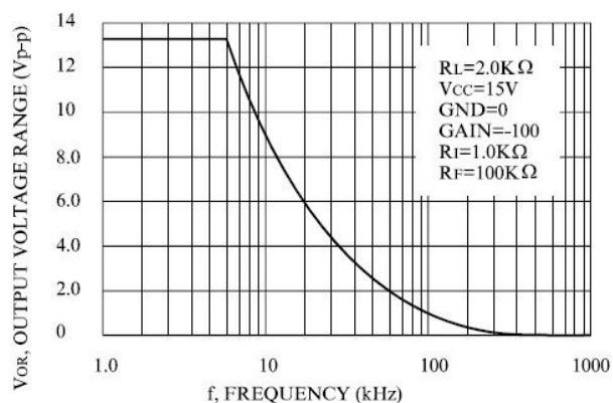


Figure 4. Large Signal Frequency Response

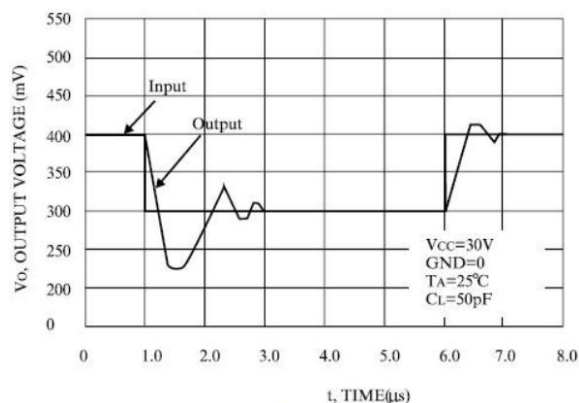


Figure 5. Small-Signal Voltage Follower Pulse Response (Noninverting)

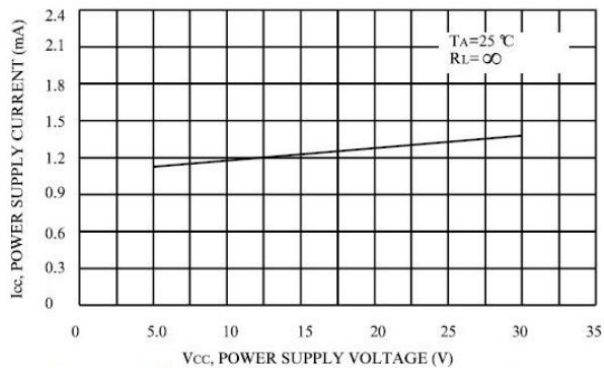


Figure 6. Power Supply Voltage VS Current

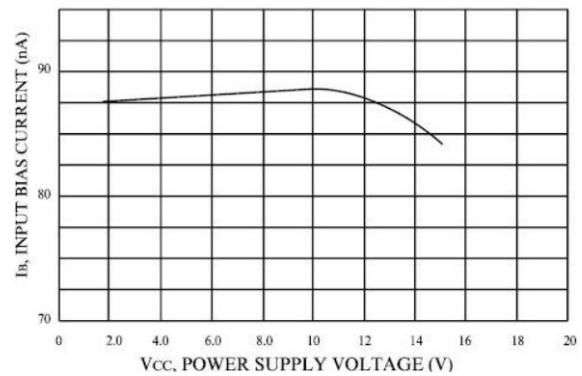


Figure 7. Input Bias Current VS Power Supply Voltage

Package Information

SOP-8


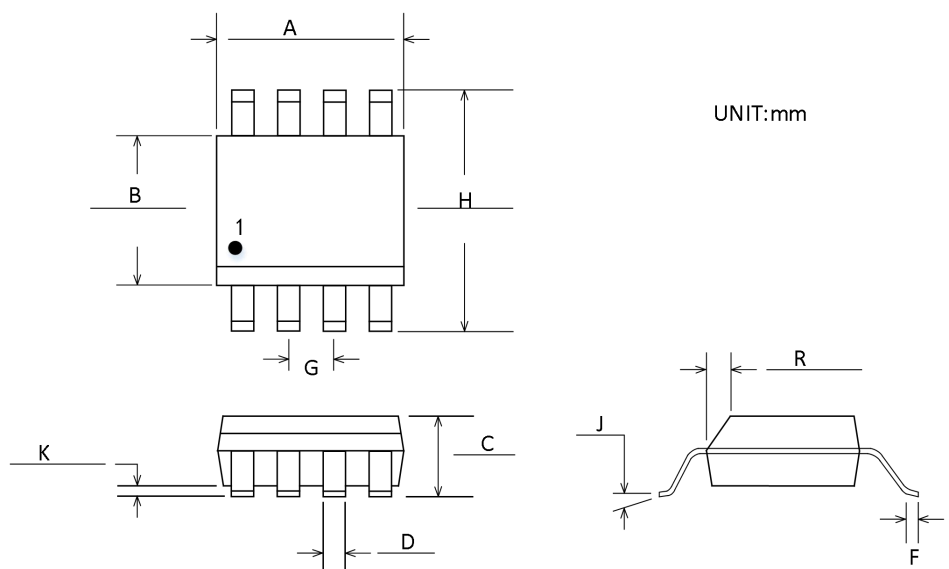


Figure 8. SOP-8 Package Dimensions

Symbol	Dimensions In Millimeters	
	Min	Max
A	4.80	5.00
B	3.80	4.00
C	1.35	1.75
D	0.31	0.51
F	0.40	1.27
G	1.27BSC	
H	5.80	6.20
J	0°	8°
K	0.10	0.25
R	0.25	0.50

TSSOP-8

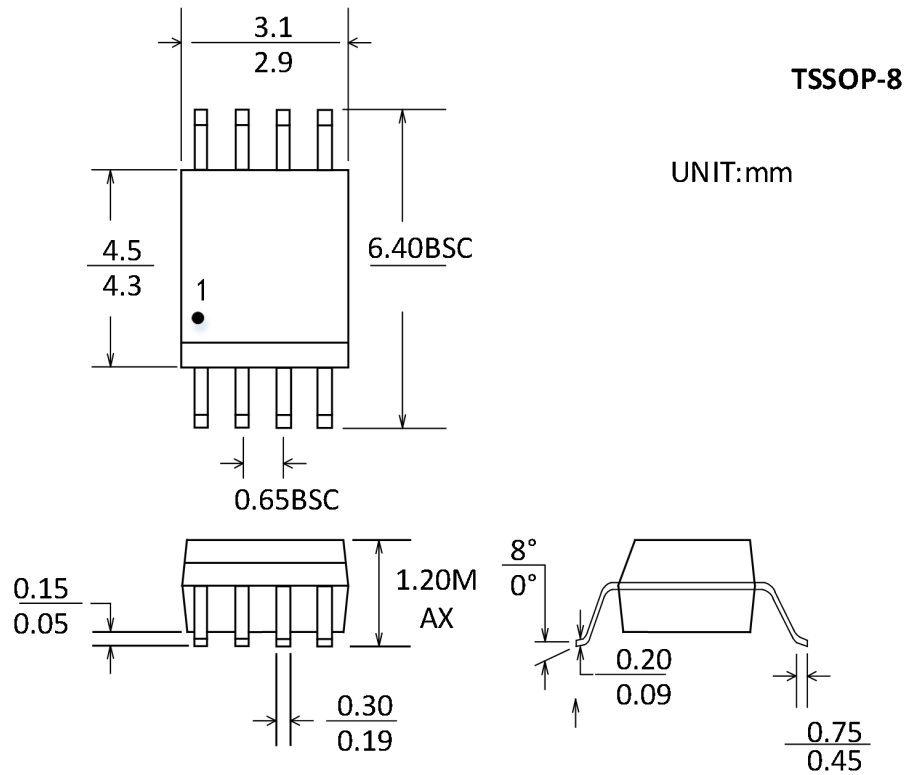

Package/Ordering Information

ORDERING NUMBER	TEMPRANGE	PACKAGE	PACEAGE MARKING	TRANSPOT MEDIA,QUANTILY
CBM2904AS8	-40°C~105°C	SOP-8	CBM2904A	Tape and Reel,2500
CBM2901ATS8	-40°C~105°C	TSSOP-8	CBM2904AT	Tape and Reel,3000