

Features

- HIGH GAIN BANDWIDTH:14MHz
- RAIL-TO-RAIL INPUT AND OUTPUT 0.6mV
Typical Vos
- INPUT VOLTAGE RANGE: -0.1V to +5.6V
with Vs = 5.5V
- SUPPLY RANGE: +2.5V to +5.5V
- SHUTDOWN: CBM8821S/CBM8822S
- SPECIFIED UP TO +125°C
- MicroSIZE PACKAGES: SOT23-5, SOT23-6

Application

- SENSORS
- PHOTODIODE AMPLIFICATION
- ACTIVE FILTERS
- TEST EQUIPMENT
- DRIVING A/D CONVERTERS

Description


The CBM882X families of products offer low voltage operation and rail-to-rail input and output, as well as excellent speed/power consumption ratio, providing an excellent bandwidth (14MHz) and slew rate of 10V/us. The op-amps are unity gain stable and feature an ultra-low input bias current.

The devices are ideal for sensor interfaces, active filters and portable applications. The CBM8821S, CBM8822S include a shutdown mode. Under logic control, the amplifiers can be switched from normal operation to a standby current that is less than 1uA. The CBM882X families of operational amplifiers are specified at the full temperature range of -40°C to +125°C under single or dual power supplies of 2.5V to 5.5V.


CATALOG

Features.....	
Application.....	
Description.....	
Pin Configurations.....	1
Electrical Characteristics.....	3
Typical Characteristics.....	.6
Application Notes.....	8
CBM8821S/CBM8822S ENABLE FUNCTION.....	8
Layout Guidelines.....	9
Instrumentation Amplifier.....	9
Package Outline Dimensions.....	10
SOT23-5.....	10
SOT23-6.....	.11
MSOP-8.....	12
MSOP-10.....	13
TSSOP-14.....	14
SOIC-8(SOP8).....	.15
SOIC-14(SOP14).....	.16
Package/Ordering Information.....	17


Pin Configurations

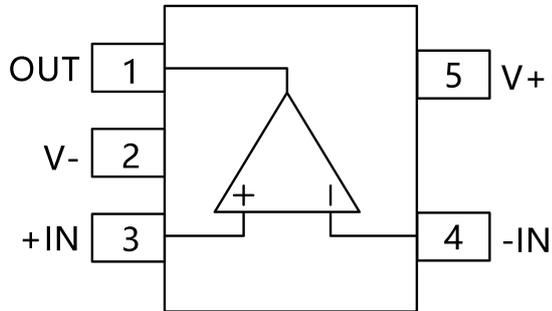


SOT23-5

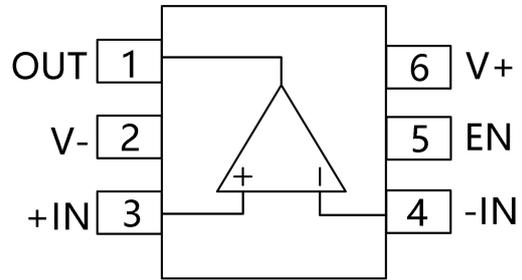


SOT23-6

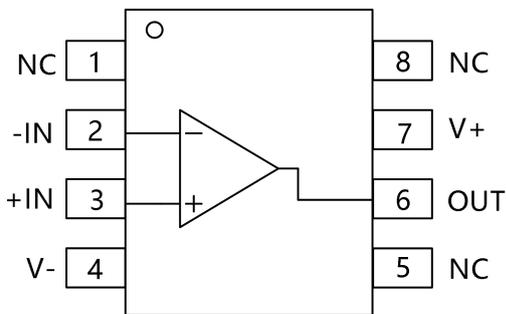


SOIC-8(SOP8) , MSOP-8

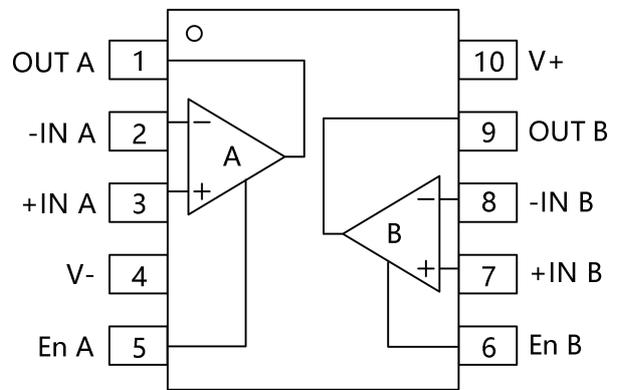


MSOP-10

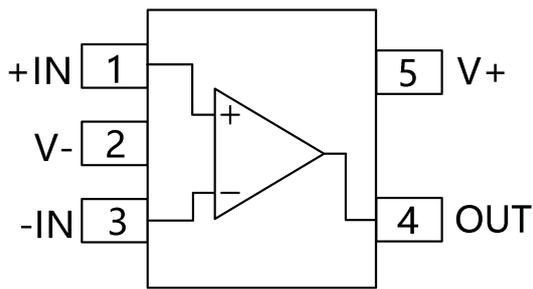


SOT23-5

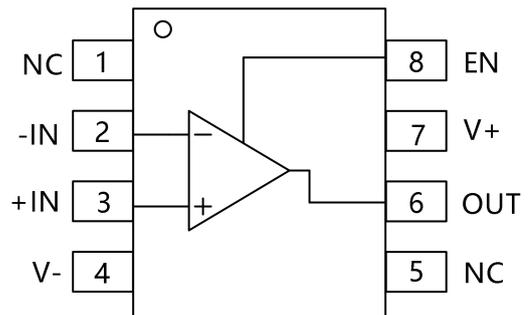

SOIC-8(SOP8)

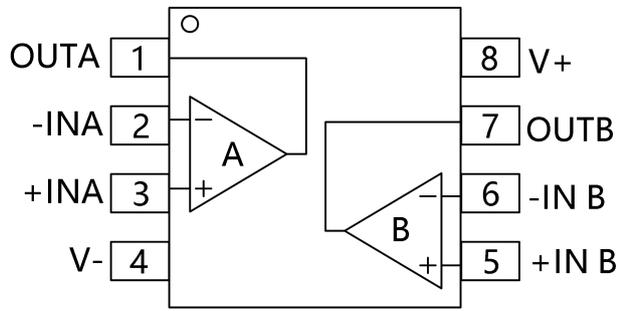

SOIC-8(SOP8),MSOP-8

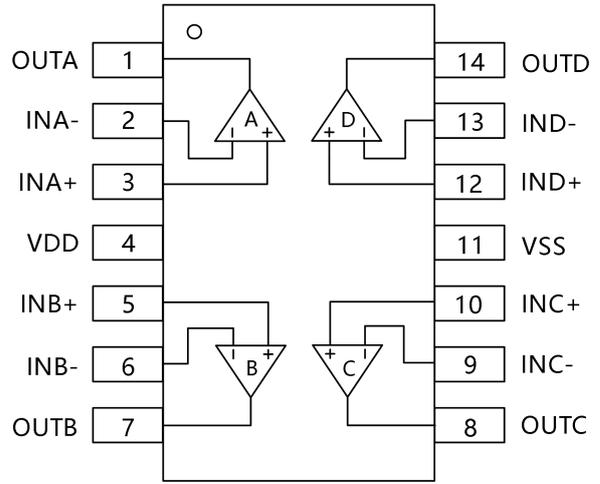

SOIC-14(SOP14),TSSOP-14

Electrical Characteristics

- ..Supply Voltage, V+ to V-..... 7.0V
- ..Input Terminals, Voltage ⁽²⁾.....- 0.5 to (V+) + 0.5V
Current ⁽²⁾..... ±10mA
- ..Storage Temperature..... -65°C to +150°C
- ..Operating Temperature..... -40°C to +125°C
- ..Junction Temperature..... 150°C
- ..Package Thermal Resistance @ T_A= +25°C
- ..SOT23-5, SOT23-6..... 200°C/W
- ..MSOP-10, SOIC-8, TSSOP-8..... 150°C/W
- ..SOIC-14, TSSOP-14..... 100°C/W
- ..Lead Temperature (Soldering, 10s)..... 260°C ESD Susceptibility
- ..HBM..... 5000V
- ..MM..... 400V

1.Stresses above these ratings may cause permanent damage. Exposure to absolute maximum conditions for extended periods may degrade device reliability. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those specified is not implied.

2.Input terminals are diode-clamped to the power-supply rails. Input signals that can swing more than 0.5V beyond the supply rails should be current-limited to 10mA or less.



ESD SENSITIVITY CAUTION

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

Electrical Characteristics







(At $T_A = +25^\circ\text{C}$, $V_S = 5\text{V}$, $R_L = 10\text{k}\Omega$ connected to $V_S/2$, and $V_{OUT} = V_S/2$, unless otherwise noted.)

PARAMETER		CONDITIONS	T_J	CBM8821S, CBM8822S, CBM8821, CBM8822, CBM8824			UNIT
				MIN	TYP	MAX	
POWER SUPPLY							
V_S	Operating Voltage Range		25°C	2.5		5.5	V
I_Q	Quiescent Current/Amplifier		25°C		1.9	2.5	μA
PSRR	Power-Supply Rejection Ratio	$V_S = 2.5\text{V to } 5.5\text{V}$ $V_{CM} = (V_-) + 0.5\text{V}$	25°C	75	88		dB
			$-40^\circ\text{C to } 125^\circ\text{C}$	65			
INPUT							
V_{OS}	Input Offset Voltage		25°C		0.6	2.5	mV
$V_{OS} T_C$	Input Offset Voltage Average Drift	$-40^\circ\text{C to } 125^\circ\text{C}$			1.6		$\mu\text{V}/^\circ\text{C}$
I_B	Input Bias Current		25°C		1	10	pA
I_{OS}	Input Offset Current		25°C		1	10	pA
V_{CM}	Common-Mode Voltage Range	$V_S = 5.5\text{V}$	25°C	-0.1		5.6	V
CMRR	Common-Mode Rejection Ratio	$V_S = 5.5\text{V}$ $V_{CM} = -0.1\text{V to } 4\text{V}$	25°C	75	88		dB
			$-40^\circ\text{C to } 125^\circ\text{C}$	67			
			25°C	61	75		
			$-40^\circ\text{C to } 125^\circ\text{C}$	58			
OUTPUT							
A_{OL}	Open-Loop Voltage Gain	$R_L = 2\text{k}\Omega$ $V_O = 0.15\text{V to } 4.85\text{V}$	25°C	91	100		dB
			$-40^\circ\text{C to } 125^\circ\text{C}$	78			
			25°C	89	98		
			$-40^\circ\text{C to } 125^\circ\text{C}$	75			
	Output Swing From Rail	$R_L = 2\text{k}\Omega$ $R_L = 10\text{k}\Omega$	25°C		20		mV
					7		
I_{OUT}	Output Short-Circuit Current		25°C		110		mA

FREQUENCY RESPONSE							
SR	Slew Rate		25°C		10		V/us
GBP	Gain-Bandwidth Product		25°C		14		MHz
PM	Phase Margin		25°C		58		°
T _S	Setting Time,0.1%				0.2		us
	Overload Recovery Time	V _{IN} ·Gain≥V _S			0.3		us
NOISE							
e _n	Input Voltage Noise Density	f = 1KHz	25°C		8.5		nV/√Hz
		f = 10KHz	25°C		5.5		nV/√Hz
ENABLE/SHUTDOWN(CBM8541,CBM8542)							
I _{Q(OFF)}	Supply Current in Shutdown		25°C		<1		uA
T _{OFF}			25°C		3		us
T _{ON}			25°C		20		us
V _L	Shut Down		25°C	V-		(V-)+0.8	V
V _H	Amplifier Is Active		25°C	(V-)+2		V+	V







Typical Characteristics

At $T_A = +25^\circ\text{C}$, $V_S = 5\text{V}$, $R_L = 10\text{k}\Omega$ connected to $V_S/2$, $V_{OUT} = V_S/2$, unless otherwise noted.

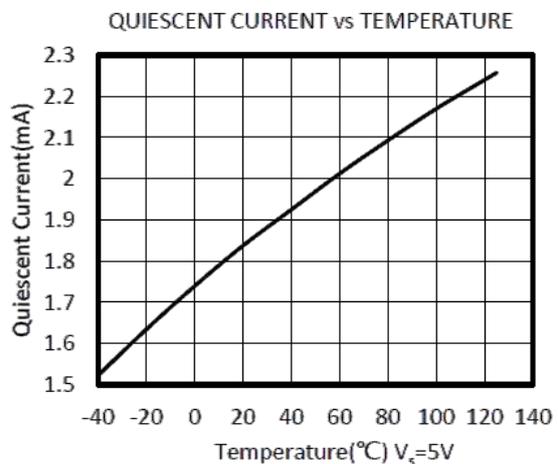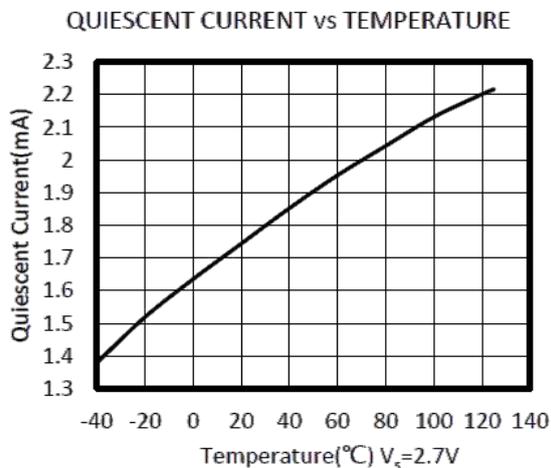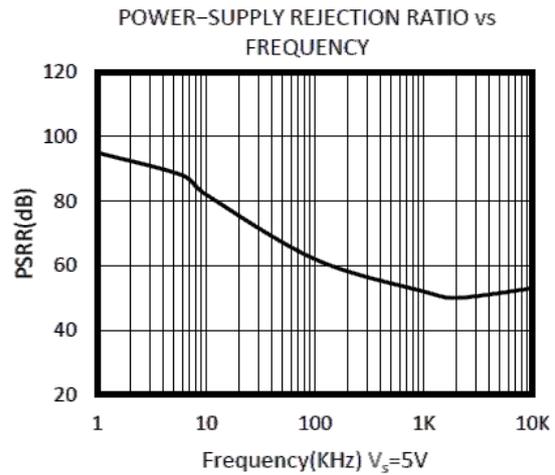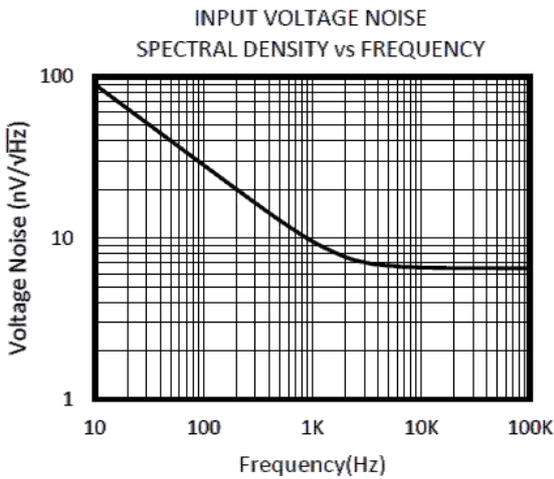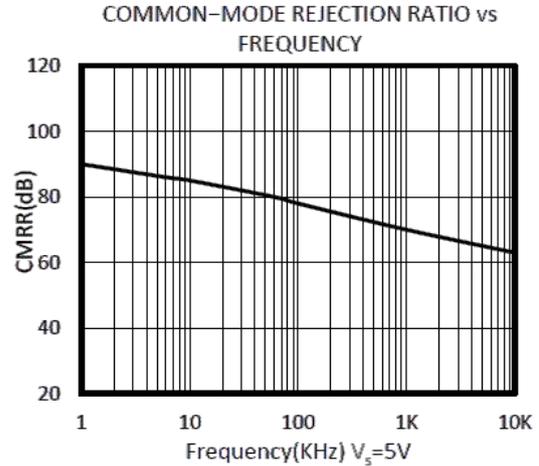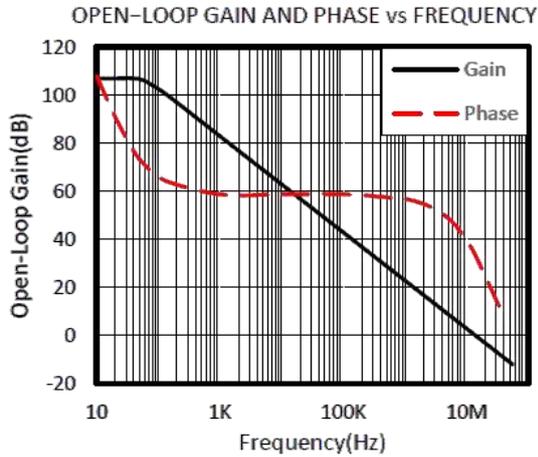



Typical Characteristics

AT $T_A = +25^\circ\text{C}$ $V_S = 5\text{V}$, $R_L = 10\text{ k}\Omega$ connected to $V_S/2$ and $V_{OUT} = V_S/2$, unless otherwise noted.

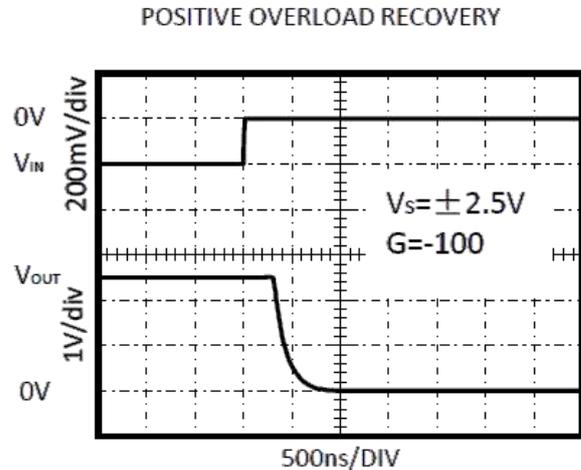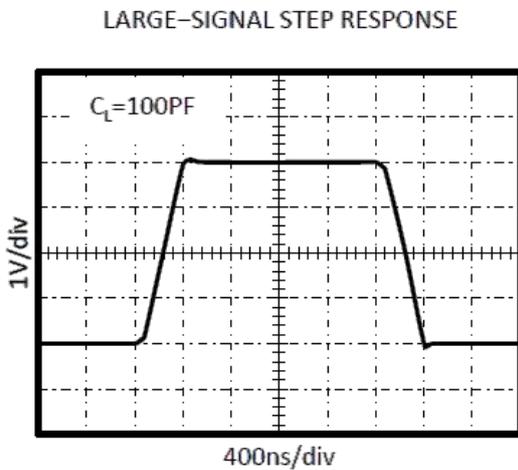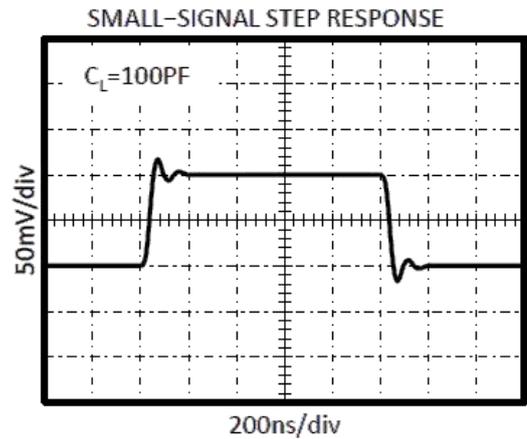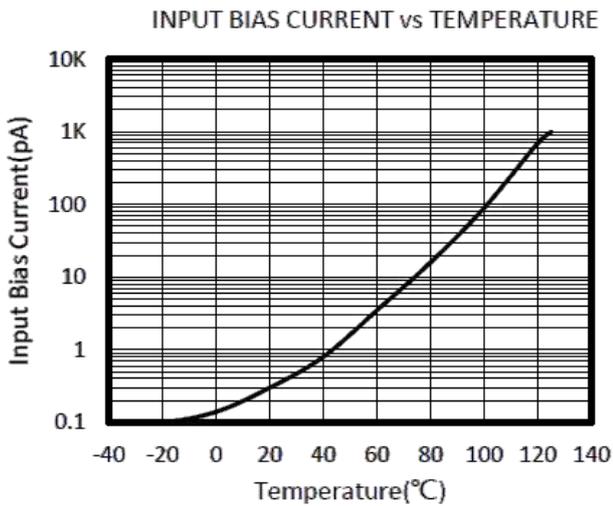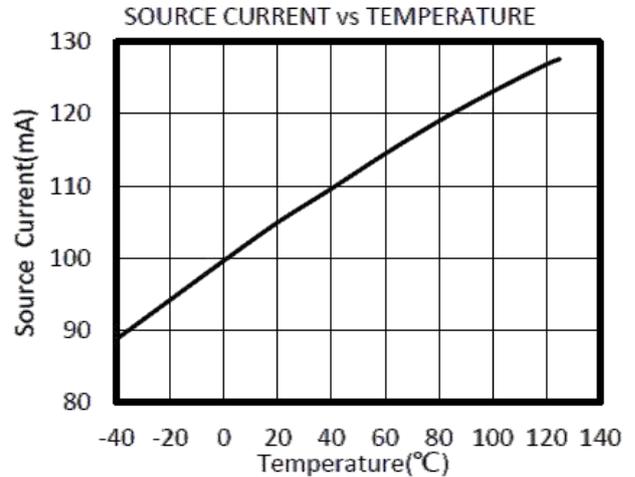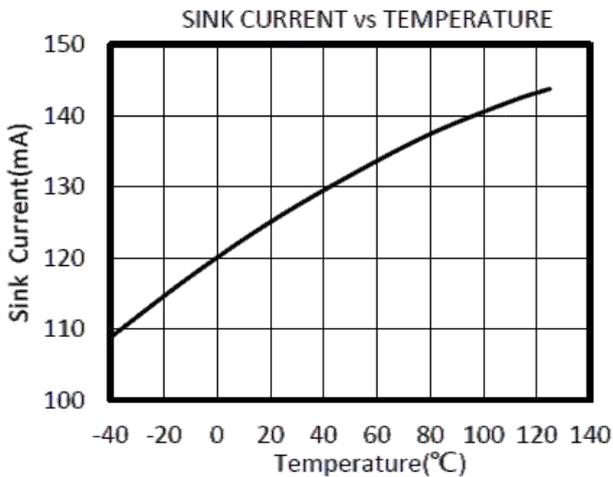

Typical Characteristics

At $T_A = +25^\circ\text{C}$, $V_S = 5\text{V}$, $R_L = 10\text{k}\Omega$ connected to $V_S/2$, $V_{OUT} = V_S/2$, unless otherwise noted.

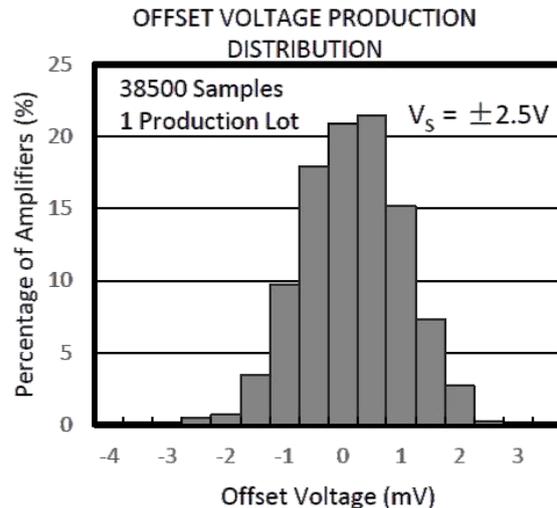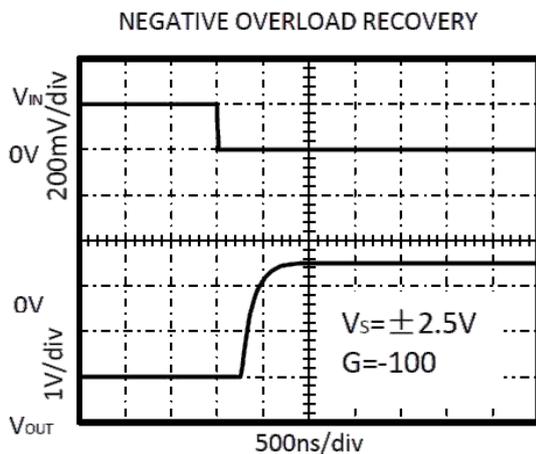

Application Notes

The CBM8821, CBM8822, CBM8824, CBM8821S, CBM8822S are high precision, rail-to-rail operational amplifiers that can be run from a single-supply voltage 2.5V to 5.5V ($\pm 1.25\text{V}$ to $\pm 2.75\text{V}$). Supply voltages higher than 7V (absolute maximum) can permanently damage the amplifier.

Rail-to-rail input and output swing significantly increases dynamic range, especially in low-supply applications.

Good layout practice mandates use of a 0.1 μF capacitor place closely across the supply pins.

CBM8821S/CBM8822S ENABLE FUNCTION

The CBM8821S/CBM8822S includes a shutdown mode. Under logic control, the amplifiers can be switched from normal mode to a standby current of 1 μA . When the Enable pin is connected to high, the amplifier is active. Connecting Enable low disables the amplifier, and places the amplifier, and place the output in a high-impedance state.

Layout Guidelines

Attention to good layout practices is always recommended. Keep traces short. When possible, use a PCB ground plane with surface-mount components placed as close to the device pins as possible. Place a 0.1uF capacitor closely across the supply pins.

These guidelines should be applied throughout the analog circuit to improve performance and provide benefits such as reducing the EMI susceptibility.

Instrumentation Amplifier

In the three-op amp, instrumentation amplifier configuration shown in Figure2.

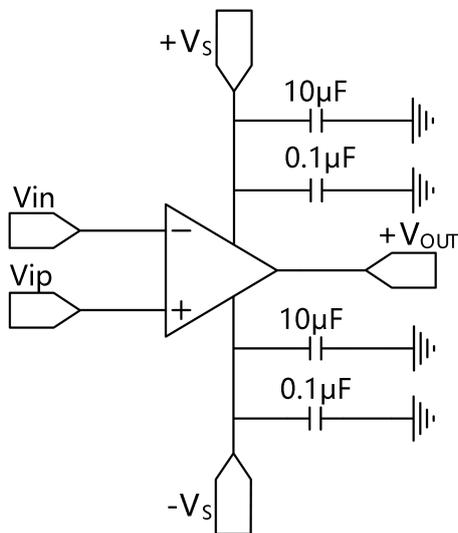


Figure 1. Amplifier with Bypass Capacitors


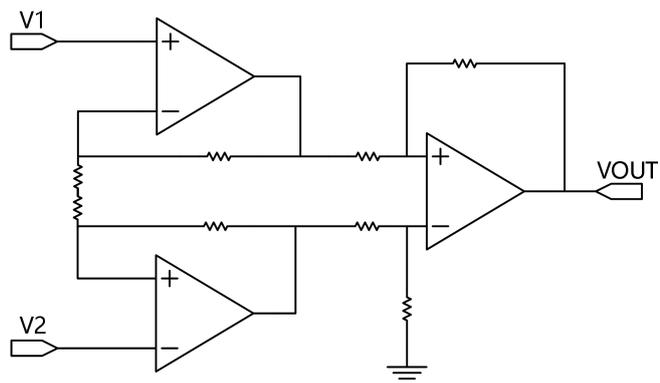


Figure2. Amplifier instrumentation amplifier


Package Outline Dimensions

SOT23-5

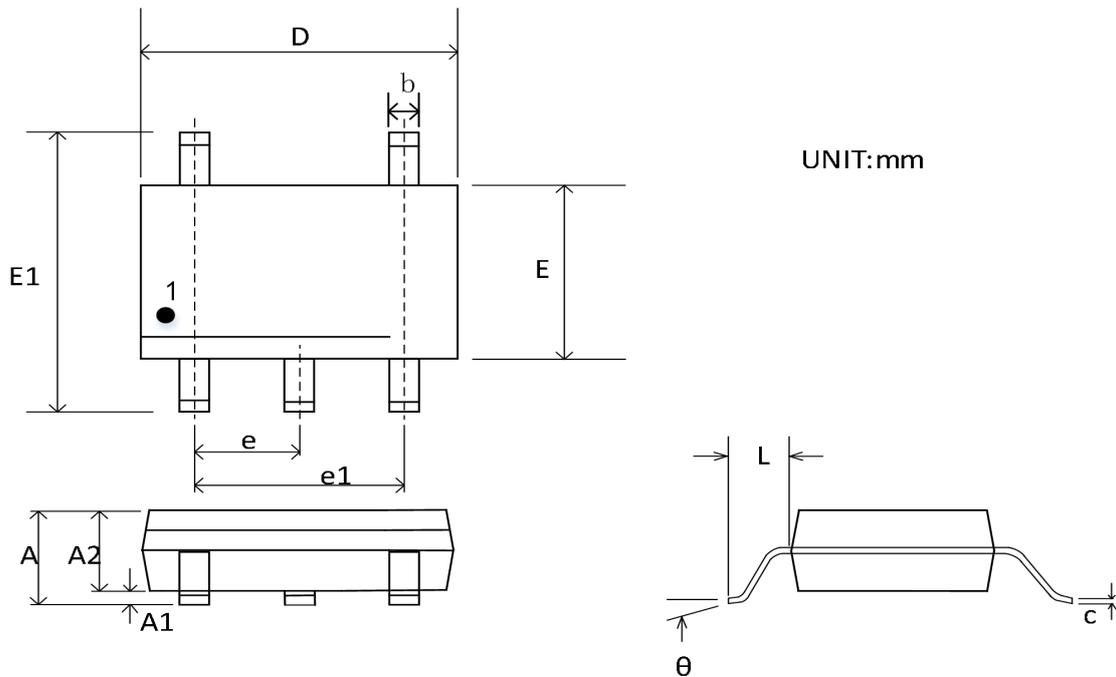


Symbol	Dimensions In Millimeters		Dimensions Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950 BSC		0.037 BSC	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

SOT23-6

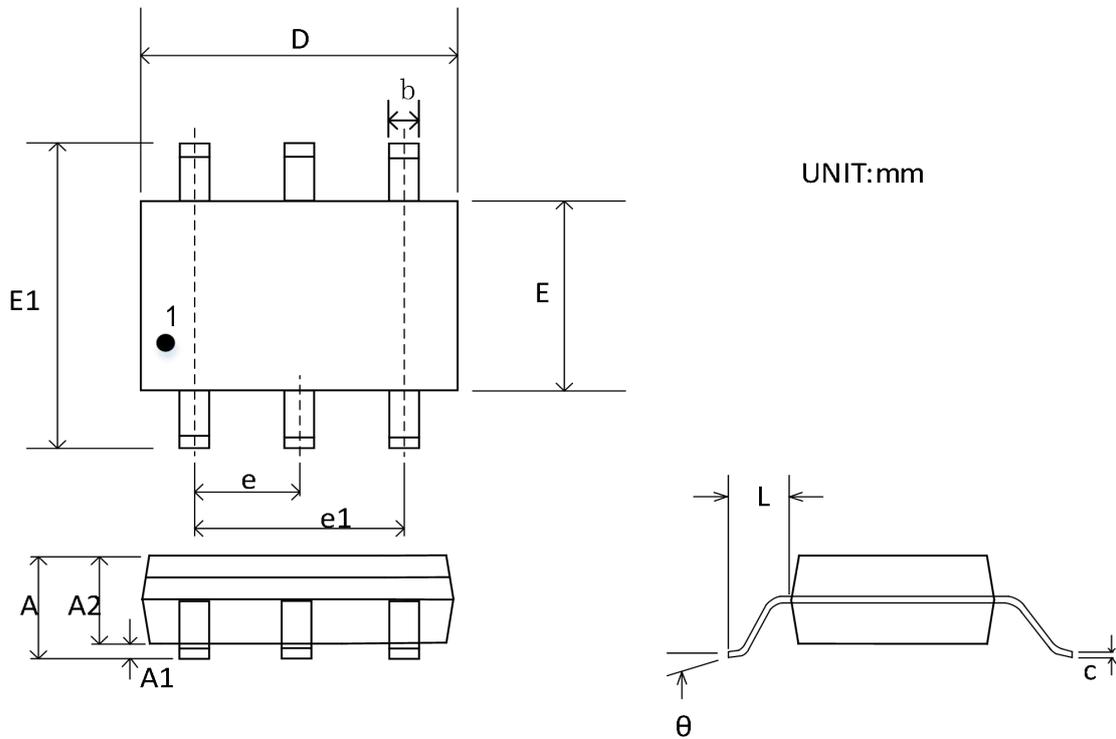


Symbol	Dimensions In Millimeters		Dimensions Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950 BSC		0.037 BSC	
e1	1.900 BSC	0.075 BSC		
L	0.300		0.600	
θ	0°	8°	0°	8°

MSOP-8

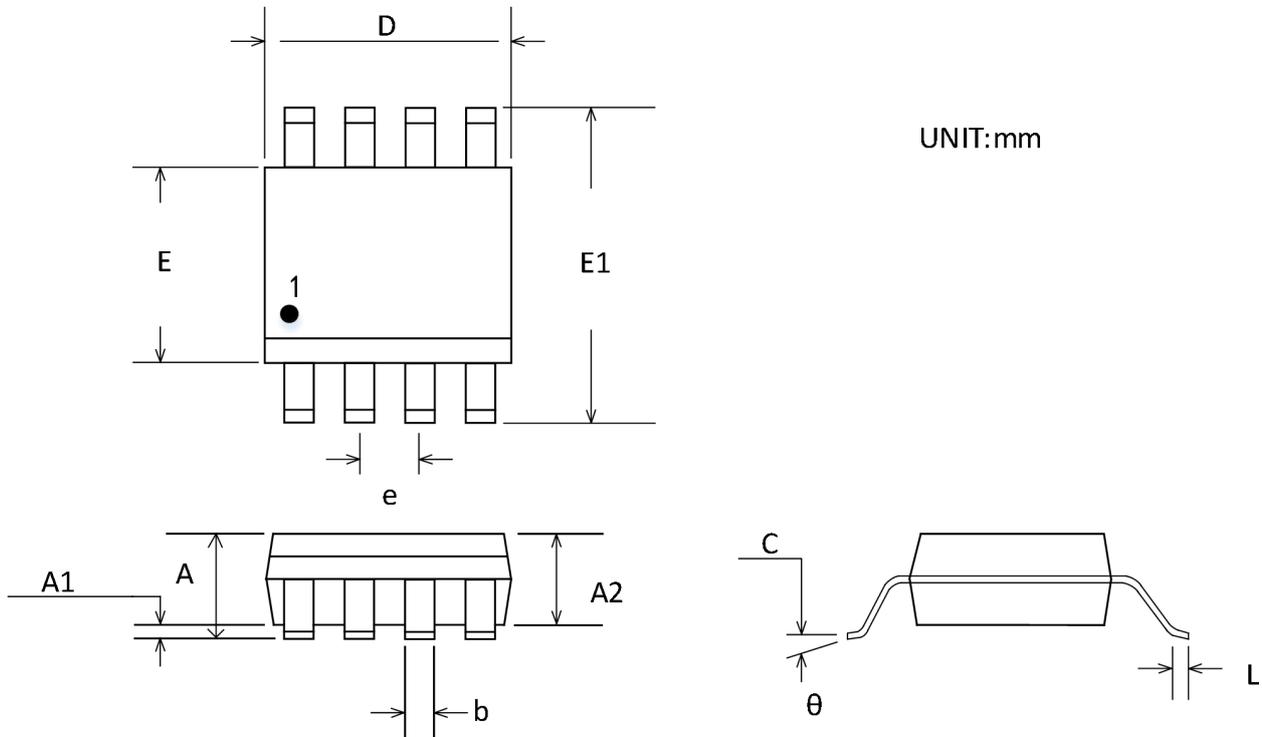


Symbol	Dimensions In Millimeters		Dimensions Inches	
	Min	Max	Min	Max
A	0.820	1.100	0.032	0.043
A1	0.020	0.150	0.001	0.006
A2	0.750	0.950	0.030	0.037
b	0.250	0.380	0.010	0.015
c	0.090	0.230	0.004	0.009
D	2.900	3.100	0.114	0.122
E	2.900	3.100	0.114	0.122
E1	4.750	5.050	0.187	0.199
e	0.650 BSC		0.026 BSC	
L	0.400	0.800	0.016	0.031
θ	0°	6°	0°	6°

MSOP-10

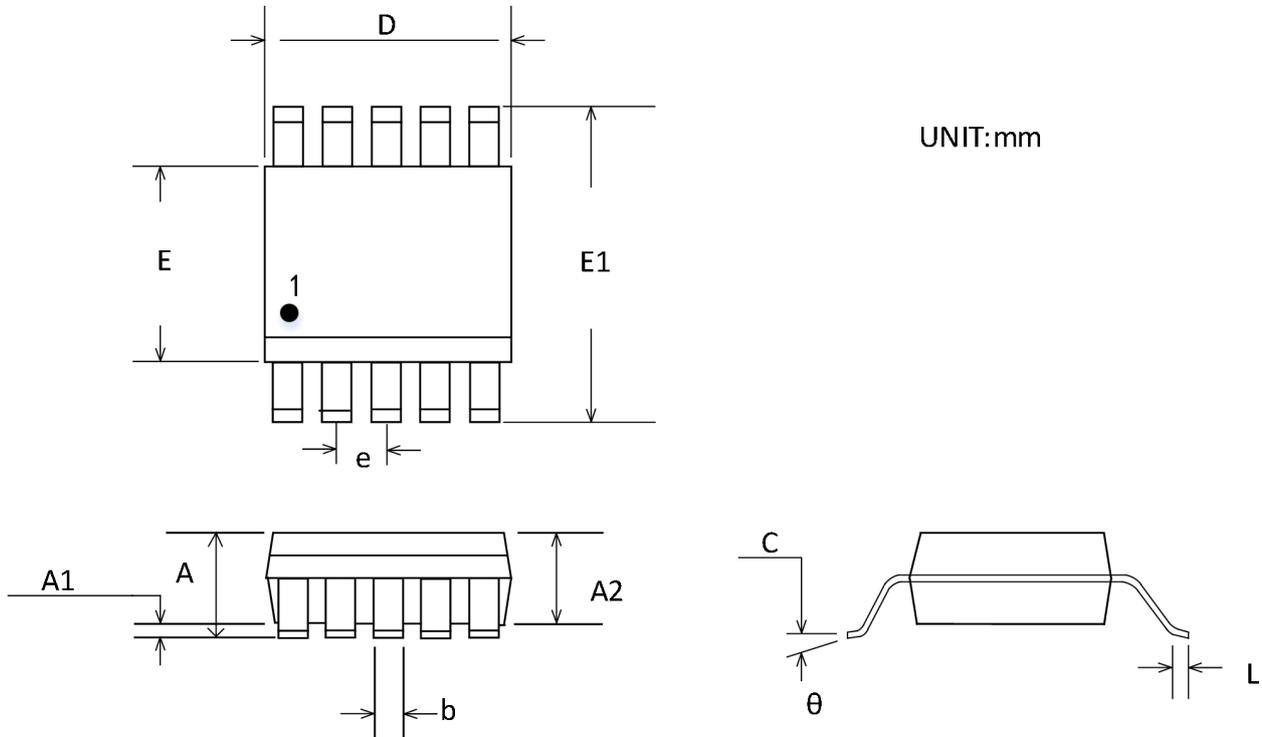


Symbol	Dimensions In Millimeters		Dimensions Inches	
	Min	Max	Min	Max
A	0.820	1.100	0.032	0.043
A1	0.020	0.150	0.001	0.006
A2	0.750	0.950	0.030	0.037
b	0.180	0.280	0.007	0.011
c	0.090	0.230	0.004	0.009
D	2.900	3.100	0.114	0.122
E	2.900	3.100	0.114	0.122
E1	4.750	5.050	0.187	0.199
e	0.50 BSC		0.020 BSC	
L	0.400	0.800	0.016	0.031
θ	0°	6°	0°	6°

TSSOP-14

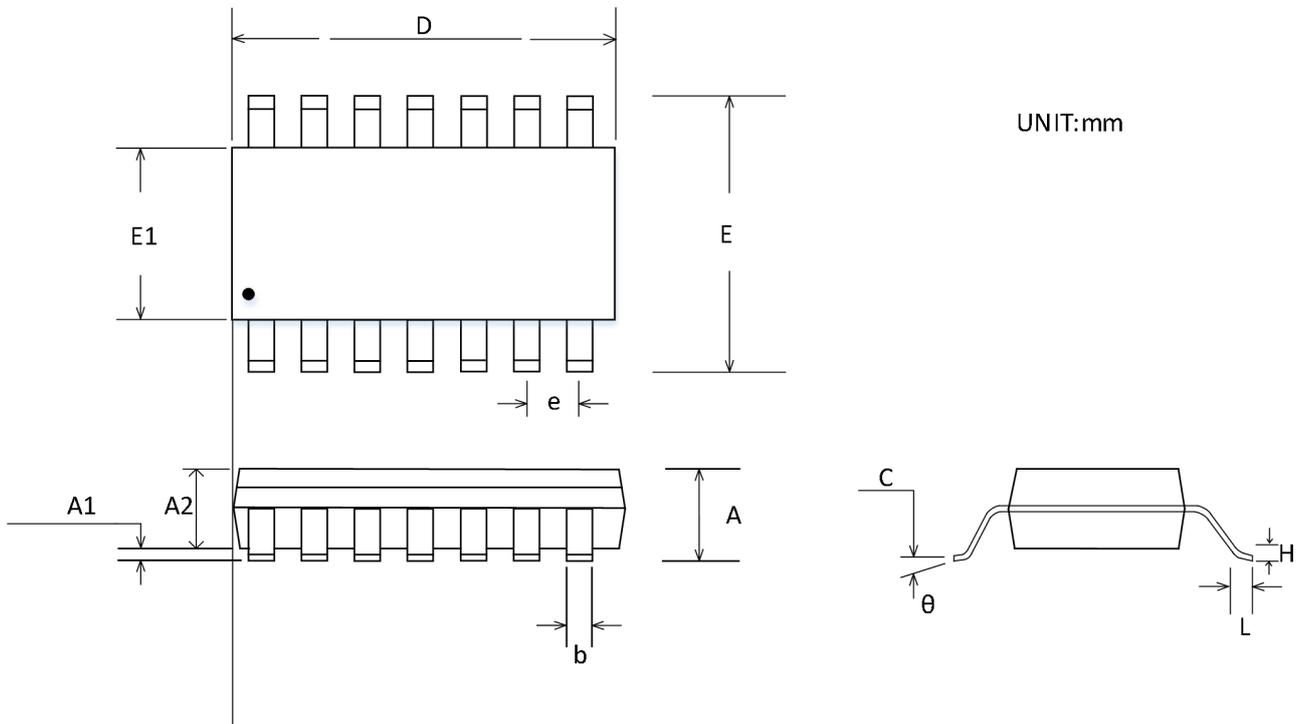


Symbol	Dimensions In Millimeters		Dimensions Inches	
	Min	Max	Min	Max
A		1.200		0.047
A1	0.050	0.150	0.002	0.006
A2	0.800	1.050	0.031	0.041
b	0.190	0.300	0.007	0.012
c	0.090	0.200	0.004	0.008
D	4.860	5.100	0.191	0.201
E	4.300	4.500	0.169	0.177
E1	6.250	6.550	0.246	0.258
e	0.650 BSC		0.026 BSC	
L	0.500	0.700	0.020	0.028
H	0.25 TYP		0.01 TYP	
θ	1°	7°	1°	7°

SOIC-8(SOP8)

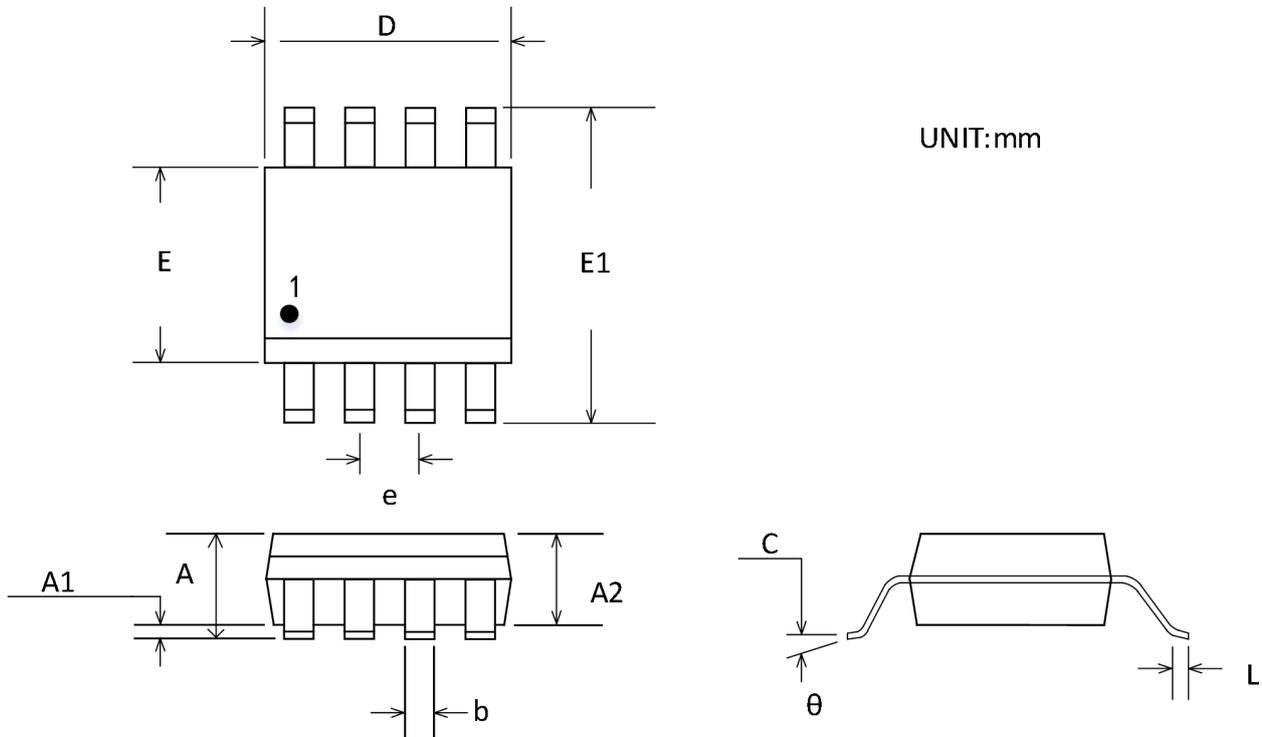

Symbol	Dimensions In Millimeters		Dimensions Inches	
	Min	Max	Min	Max
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.007	0.010
D	4.800	5.000	0.189	0.197
E	5.800	6.200	0.228	0.244
E1	3.800	4.000	0.150	0.157
e	1.270 BSC		0.050 BSC	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°

SOIC-14(SOP14)

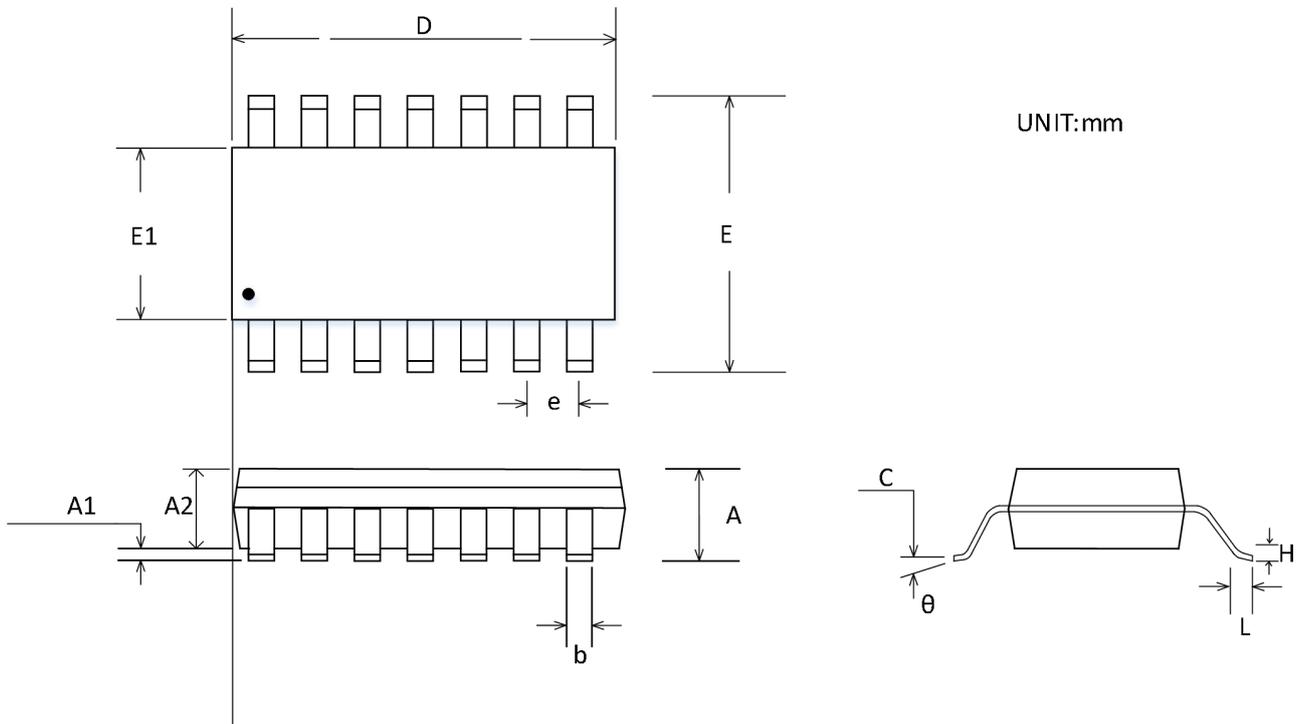

Symbol	Dimensions In Millimeters		Dimensions Inches	
	Min	Max	Min	Max
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.310	0.510	0.012	0.020
c	0.100	0.250	0.004	0.010
D	8.450	8.850	0.333	0.348
E	5.800	6.200	0.228	0.244
E1	3.800	4.000	0.150	0.157
e	1.270 BSC		0.050 BSC	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°

Package/Ordering Information

ORDERING NUMBER	TEMPRANGE	PACKAGE	PAKEAGE MARKING	TRANSPOT MEDIA,QUANTILY
CBM8821AS8	-40°C~125°C	SOIC-8(SOP8)	CBM821A	Tape and Reel,2500
CBM8821AS8-RL	-40°C~125°C	SOIC-8(SOP8)	CBM821A	Tape and Reel,3000
CBM8821AS8-REEL	-40°C~125°C	SOIC-8(SOP8)	CBM821A	Tape and Reel,4000
CBM8821AST5	-40°C~125°C	SOT23-5	821	Tape and Reel,3000
CBM8821ABS5	-40°C~125°C	SOT23-5	821B	Tape and Reel,3000
CBM8821AMS8	-40°C~125°C	MSOP-8	821M	Tape and Reel,3000
CBM8821SA8	-40°C~125°C	SOIC-8(SOP8)	CBM8821S	Tape and Reel,2500
CBM8821SA8-RL	-40°C~125°C	SOIC-8(SOP8)	CBM8821S	Tape and Reel,3000
CBM8821SA8-REEL	-40°C~125°C	SOIC-8(SOP8)	CBM8821S	Tape and Reel,4000
CBM8821ST6	-40°C~125°C	SOT23-6	821S	Tape and Reel,3000
CBM8822AS8	-40°C~125°C	SOIC-8(SOP8)	CBM8822A	Tape and Reel,2500
CBM8822AS8-RL	-40°C~125°C	SOIC-8(SOP8)	CBM8822A	Tape and Reel,3000
CBM8822AS8-REEL	-40°C~125°C	SOIC-8(SOP8)	CBM8822A	Tape and Reel,4000
CBM8822AMS8	-40°C~125°C	MSOP-8	822M	Tape and Reel,3000
CBM8822SA10	-40°C~125°C	SOIC-10(SOP-10)	CBM8822S	Tape and Reel,2500
CBM8822SA10-RL	-40°C~125°C	SOIC-10(SOP-10)	CBM8822S	Tape and Reel,3000
CBM8822SA10-REEL	-40°C~125°C	SOIC-10(SOP-10)	CBM8822S	Tape and Reel,4000
CBM8824AS14	-40°C~125°C	SOIC-14(SOP14)	CBM8824A	Tape and Reel,2500
CBM8824AS14-RL	-40°C~125°C	SOIC-14(SOP14)	CBM8824A	Tape and Reel,3000
CBM8824AS14-REEL	-40°C~125°C	SOIC-14(SOP14)	CBM8824A	Tape and Reel,4000
CBM8824ATS14	-40°C~125°C	TSSOP-14	CBM8824A	Tape and Reel,2500
CBM8824ATS14-RL	-40°C~125°C	TSSOP-14	CBM8824A	Tape and Reel,3000
CBM8824ATS14-REEL	-40°C~125°C	TSSOP-14	CBM8824A	Tape and Reel,4000