

Features

- Rated supply voltage 5.0 V
- Accurate 5% or 10% microprocessor power supply monitoring
- Programming of watchdog timer overflow time
- Generation of reset signals at power on for correct microprocessor start

The chip contains reference voltage source, analog comparator, Watchdog timer, circuit for monitoring power supply deviation accuracy.

General Description

CBM1232 is designed to monitor power supply within the system of reset signal generation for microprocessors. It is used in monitor systems for controlling various processes and entities.

Functions

- Reset signal generation after power failure/ error
- Reset signal generation from external "RESET" pushbutton
- Reset signal generation from watchdog timer

CATALOG

| | |
|--|---|
| Features..... | |
| General Description..... | |
| Functions..... | |
| Pin Configurations..... | 1 |
| Pin Function Description..... | 1 |
| Absolute Maximum Ratings..... | 2 |
| Recommended Operating Conditions..... | 2 |
| Dc Electrical Characteristics($T_{amb} = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$)..... | 3 |
| AC electrical characteristics($T_{amb} = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$)..... | 3 |
| Package Information..... | 7 |
| DIP8..... | 7 |
| SOP8..... | 8 |
| Package/Ordering Information..... | 9 |

Pin Configurations

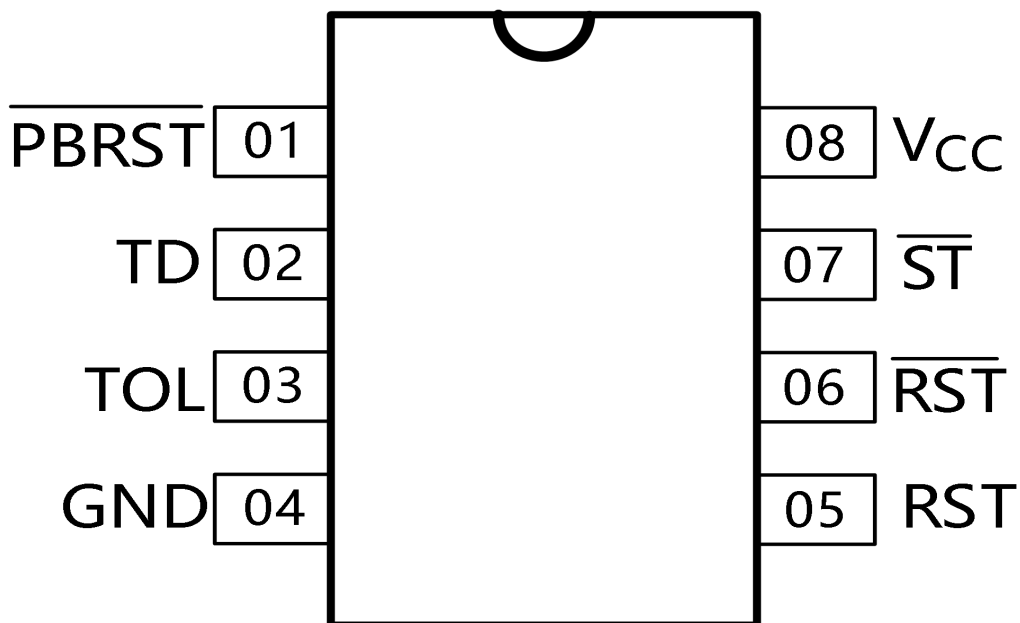


Fig 1 – PIN ASSIGNMENT

Pin Description

| Pin | Symbol | Description |
|-----|-----------------|--|
| 01 | PBRST | Pushbutton reset input |
| 02 | TD | Time Delay Set |
| 03 | TOL | Selects 5% or 10% V _{CC} Detect |
| 04 | GND | Ground |
| 05 | RST | Reset output (Active High) |
| 06 | RST | Reset output (Active Low, open drain) |
| 07 | ST | Strobe Input |
| 08 | V _{CC} | Supply output from voltage source |

Absolute Maximum Ratings

| Symbol | Parameter | Typical | | Units |
|-----------|-----------------------------|---------|------|-------|
| | | Min | Max | |
| V_{CC} | Supply voltage | - | 7.0 | V |
| V_{IH} | Input voltage, high level | - | 7.0 | V |
| V_{IL} | Input voltage, low level | -1.0 | - | V |
| T_A | Operating temperature range | -40 | +85 | °C |
| T_{STG} | Storage temperature | -60 | +125 | °C |

* Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied.

Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

Recommended Operating Conditions

| Symbol | Parameter | Typical | | Units |
|----------|-----------------------------|---------|--------------|-------|
| | | Min | Max | |
| V_{CC} | Supply voltage | 4.5 | 5.5 | V |
| V_{IH} | Input voltage, high level | 2.0 | $V_{CC}+0.3$ | V |
| V_{IL} | Input voltage, low level | -0.3 | 0.8 | V |
| T_A | Operating temperature range | -20 | +70 | °C |

Dc Electrical Characteristics ($T_{AMB} = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$)

| Symbol | Parameter | Test conditions | Typical | | Units |
|---------------------|--|---|--------------|-------|---------------|
| | | | Min | Max | |
| I_{LIL1} | Input leakage current, low level, \overline{ST} , TOL | $V_{CC}=5\text{ V}\pm 10\%$, $V_{IL}=0\text{ V}$ | - | -1 | μA |
| I_{LIL2} | Input leakage current, low level, TD | $V_{CC}=5\text{ V}\pm 10\%$, $V_{IL}=0\text{ V}$ | - | -300 | μA |
| I_{LIL3} | Input leakage current, low level, \overline{PBRST} | $V_{CC}=5\text{ V}\pm 10\%$, $V_{IL}=0\text{ V}$ | - | -1000 | μA |
| I_{LIH1} | Input leakage current, high level, \overline{ST} , TOL | $V_{CC} = 5\text{ V}\pm 10\%$, $V_{IH}=V_{CC}$ | - | 1 | μA |
| I_{LIH2} | Input leakage current, high level, TD | $V_{CC} = 5\text{ V}\pm 10\%$, $V_{IH}=V_{CC}$ | - | 300 | μA |
| I_{OH} | Output current, high level, RST | $V_{CC} = 5\text{ V}\pm 10\%$, $V_{OH}=2.4\text{ V}$ | -8 | - | μA |
| I_{OL} | Output current, low level, RST, \overline{RST} | $V_{CC} = 5\text{ V}\pm 10\%$, $V_{OL}=0.4\text{ V}$ | 8 | - | mA |
| V_{OH} | Output voltage, high level, RST | $V_{CC} = 5\text{ V}\pm 10\%$, $I_{OH}= -500\text{ }\mu\text{A}$ | $V_{CC}-0.5$ | - | V |
| V_{OH1} | Output voltage, high level,- RST | $V_{CC} = 2\text{ V}$, $I_{OH}= -500\mu\text{A}$ | $V_{CC}-0.5$ | - | V |
| V_{OL} | Output voltage, low level, RST | $V_{CC} = 2\text{ V}$, $I_{OL}=1\text{ mA}$ | - | 0.4 | V |
| I_{CC} | Operating current | $V_{CC} = 5\text{ V}\pm 10\%$ | - | 2 | mA |
| $V_{CC\text{ TP1}}$ | V_{CC} trip point | TOL = GND | 4.5 | 4.74 | V |
| $V_{CC\text{ TP2}}$ | V_{CC} trip point | TOL = V_{CC} | 4.25 | 4.49 | V |

AC electrical characteristics ($T_{AMB} = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$)

| Symbol | Parameter | Test conditions | Typical | | Units |
|------------|---|---|---------|------|---------------|
| | | | Min | Max | |
| T_{TD1} | Watchdog timer overflow time | $V_{CC} = 5.0\text{ V}\pm 10\%$, $T_{ST}\geq 20\text{ ns}$ TD = GND | 62.5 | 250 | ms |
| T_{TD2} | | TD disconnected | 250 | 1000 | ms |
| T_{TD3} | | TD = V_{CC} | 500 | 2000 | ms |
| T_{PDLY} | \overline{PBRST} stable low to RST and \overline{RST} | $V_{CC} = 5.0\text{ V}\pm 10\%$ $T_{PB}\geq 20\text{ ms}$ | - | 20 | ms |
| T_{RST} | Reset active time | $V_{CC} = 5.0\text{ V}\pm 10\%$ $T_{PB}\geq 20\text{ ms}$ | 250 | 1000 | ms |
| T_{RPD} | V_{CC} fail detect to RST and \overline{RST} | $V_{CC} = \text{from } 5.0\text{ to } 4.0\text{ V}$ $T_F\pm 10\mu\text{s}$ | - | 175 | μs |

| | | | | | |
|-----------|---|---|-----|------|----|
| T_{RPU} | V_{CC} detect to RST and RST transition | $V_{CC} =$ from 5.0 to 4.0 V $T_R \geq 1\mu s$ | 250 | 1000 | ms |
|-----------|---|---|-----|------|----|

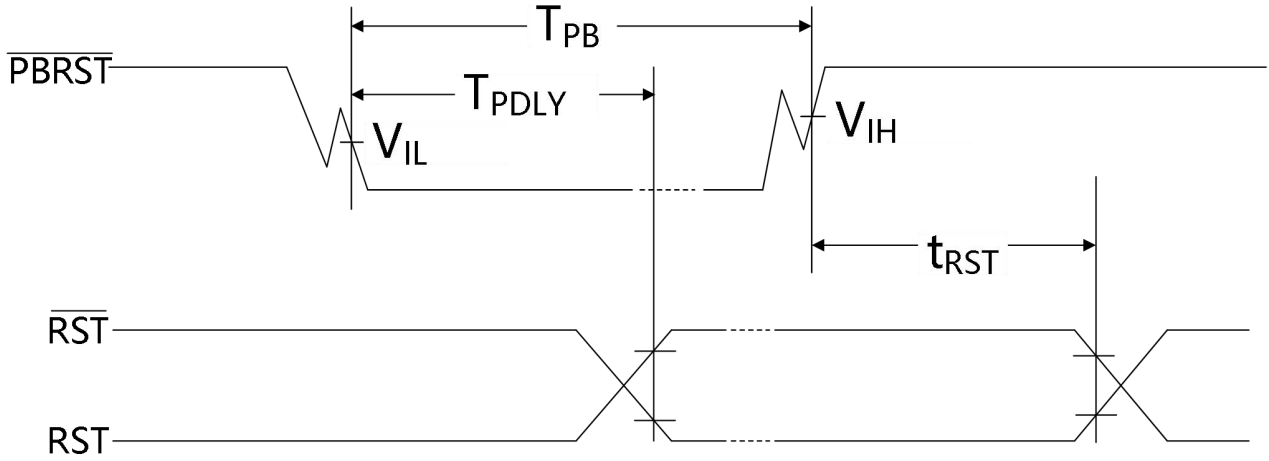


Fig. 2 – Timing diagram of forming reset signal from external PBRST control button

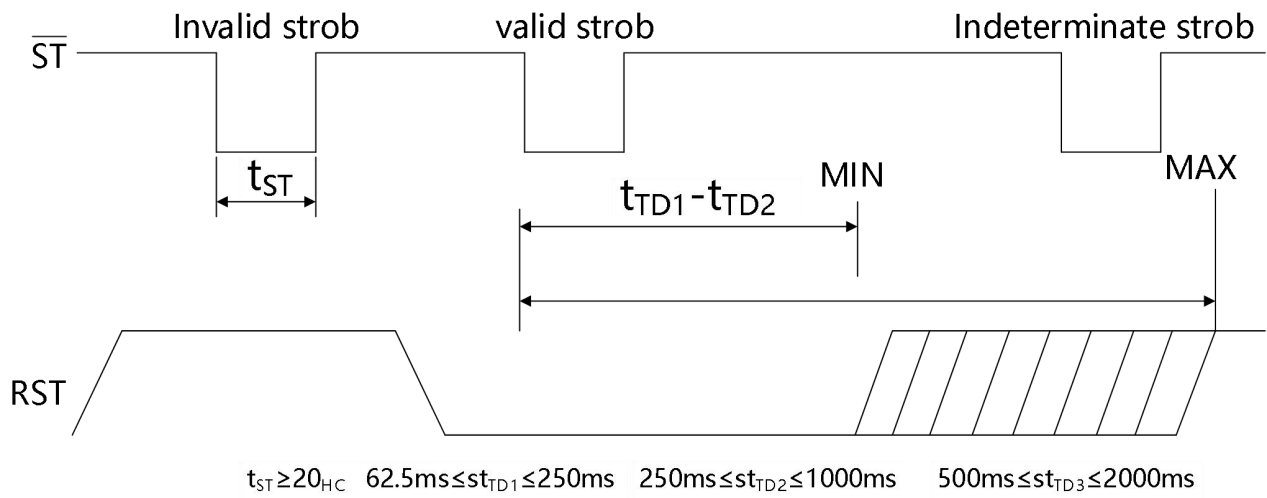


Fig. 3 – Timing diagram : Strobe input

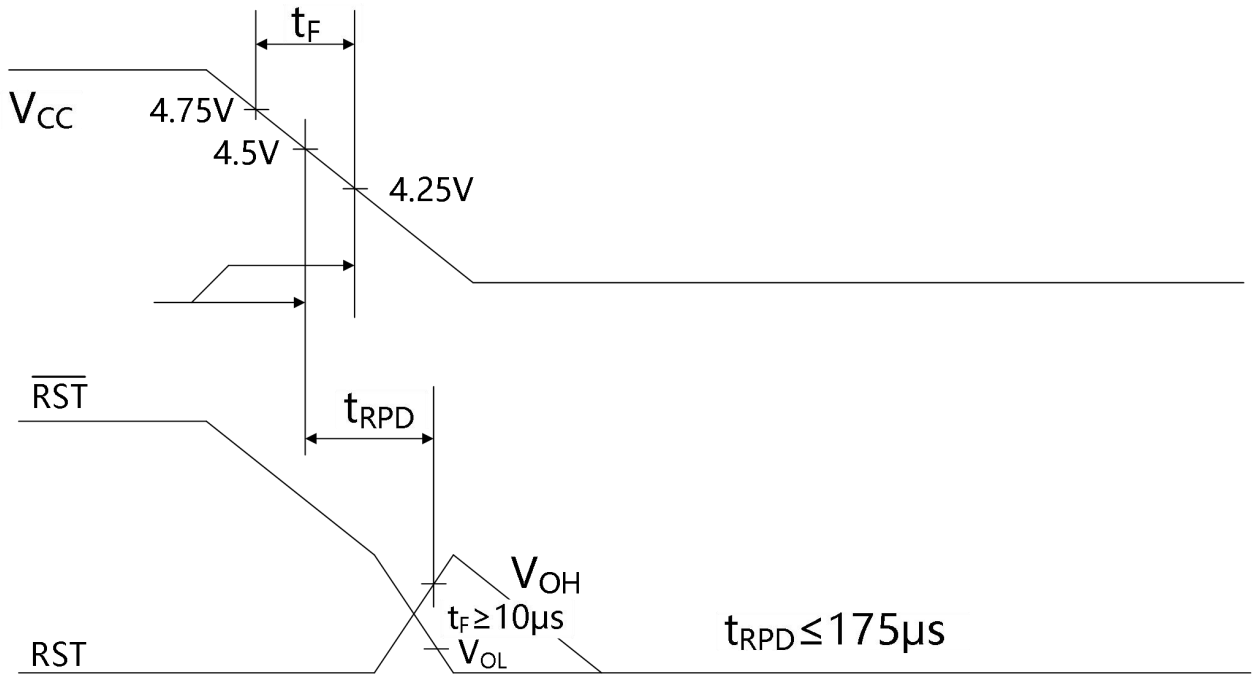


Fig. 4 – Timing diagram: power error / down to V_{CCTP}

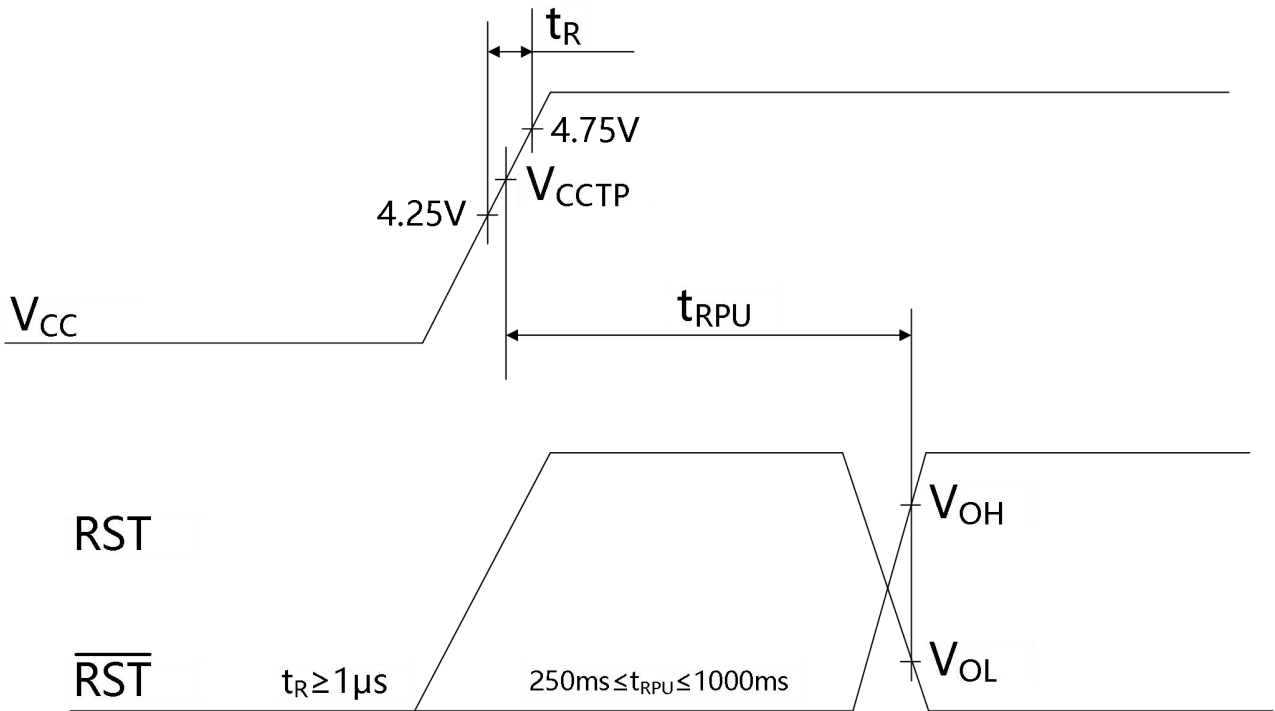


Fig. 5 – Timing diagram: Power-Up/ Stable

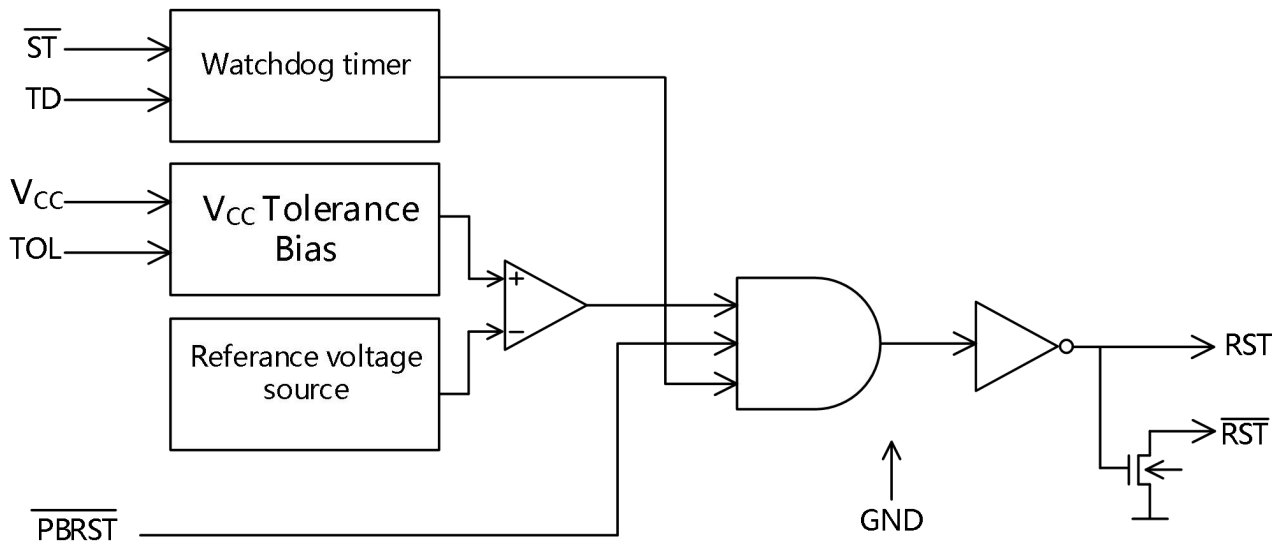


Fig.6 Block diagram


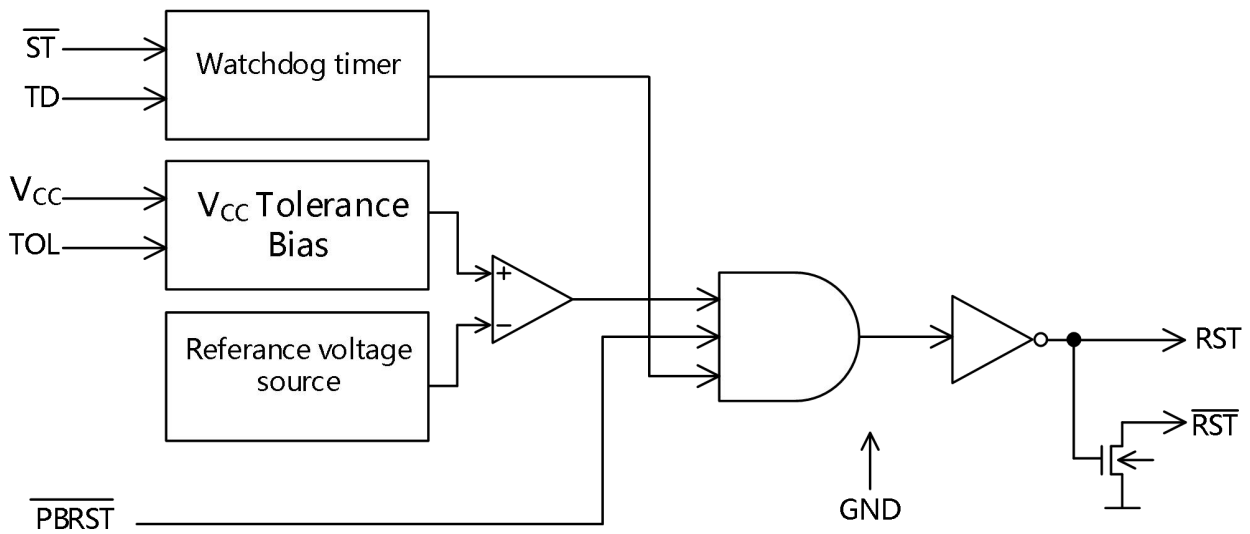


Fig.7 Application Circuit : Watchdog Timer

Package Information

DIP8

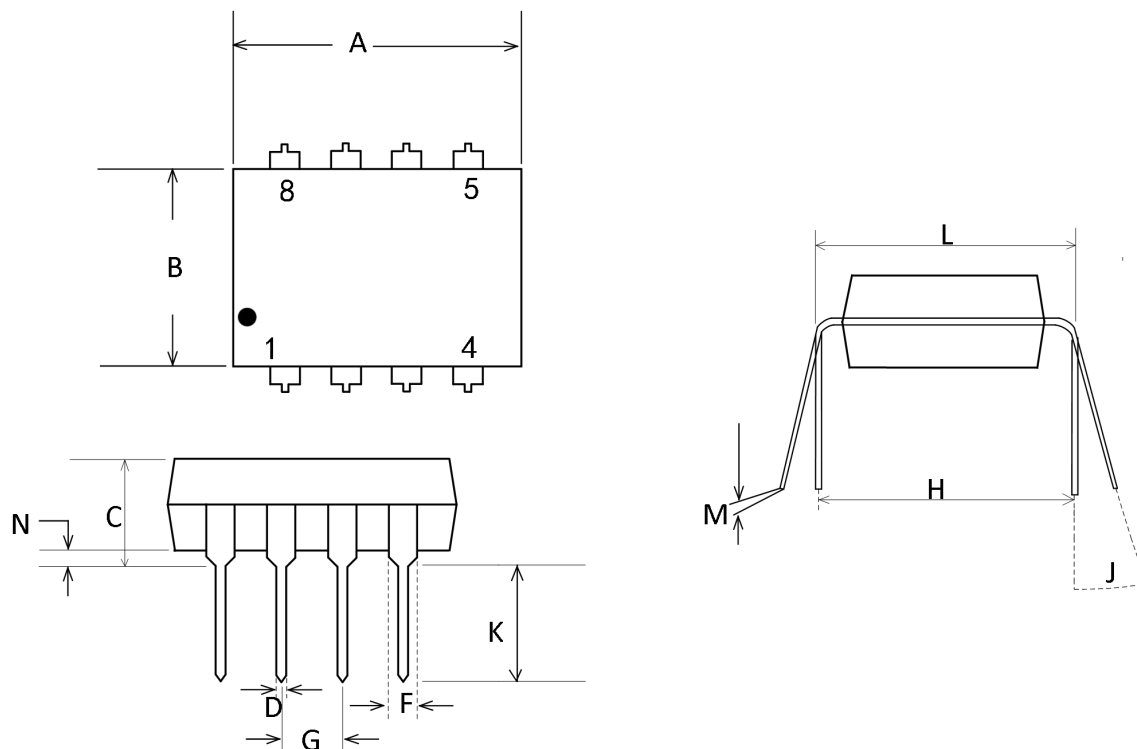


NOTES:

Dimensions "A" , "B" do not include mold flash or protrusions. Maximum mold flash or protrusions 0.25mm(0.010) per side.

| Symbol | Dimension, mm | | Symbol | Dimension, mm | |
|--------|---------------|-------|--------|---------------|------|
| | MIN | MAX | | MIN | MAX |
| A | 8.51 | 10.16 | H | 7.62 | |
| B | 4.10 | 7.11 | J | 0° | 10° |
| C | | 5.33 | K | 2.92 | 3.81 |
| D | 0.36 | 0.56 | L | 7.62 | 8.26 |
| F | 1.14 | 1.78 | M | 0.20 | 0.36 |
| G | 2.54 | | N | 0.38 | |

SOP8

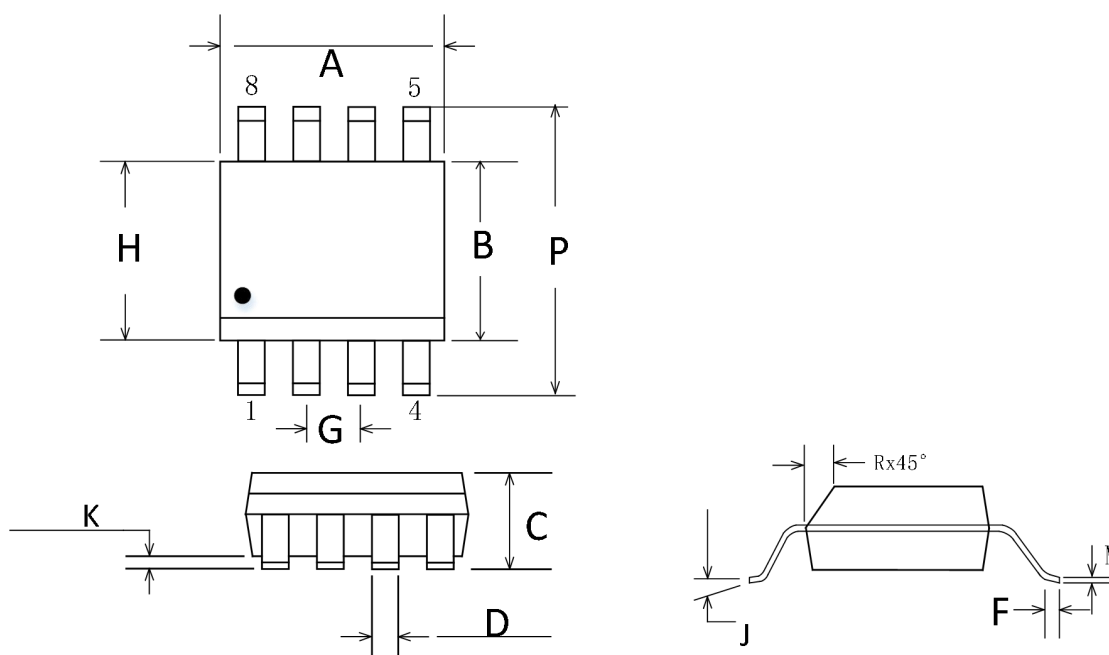

NOTES:

- Dimensions A and B do not include mold flash protrusion.
- Maximum mold flash or protrusion 0.15mm(0.006) per side for A; for B -0.25mm(0.010) per side.

| Symbol | Dimension, mm | | Symbol | Dimension, mm | |
|--------|---------------|------|--------|---------------|------|
| | MIN | MAX | | MIN | MAX |
| A | 4.80 | 5.00 | H | 5.72 | |
| B | 3.80 | 4.00 | J | 0° | B |
| C | 1.35 | 1.75 | K | 0.10 | C |
| D | 0.33 | 0.51 | M | 0.1 | D |
| F | 0.40 | 1.27 | P | 5.80 | F |
| G | 1.27 | | R | 0.25 | 0.50 |

Package/Ordering Information

| PRODUCT TYPE | OPERATING TEMPERATURE | PACKAGE | PACKAGE MARKING | NUMBER OF PACKAGES |
|-----------------|-----------------------|---------|-----------------|---------------------|
| CBM1232AS8 | -40°C~85°C | SOP-8 | CBM1232A | Tape and Reel, 2500 |
| CBM1232AS8-RL | -40°C~85°C | SOP-8 | CBM1232A | Tape and Reel, 3000 |
| CBM1232AS8-REEL | -40°C~85°C | SOP-8 | CBM1232A | Tape and Reel, 4000 |
| CBM1232ADP8 | -40°C~85°C | DIP-8 | CBM1232AD | Tube.50 |